


**RNAV 1  
STANDARD DEPARTURE CHART  
INSTRUMENT (SID) - ICAO**

TRANSITION ALTITUDE 6500

Warszawa DIRECTOR	129.375
Warszawa APPROACH	125.050, 128.800
Modlin TOWER	123.925

**Warszawa / Modlin  
RWY 08  
BRAVO**

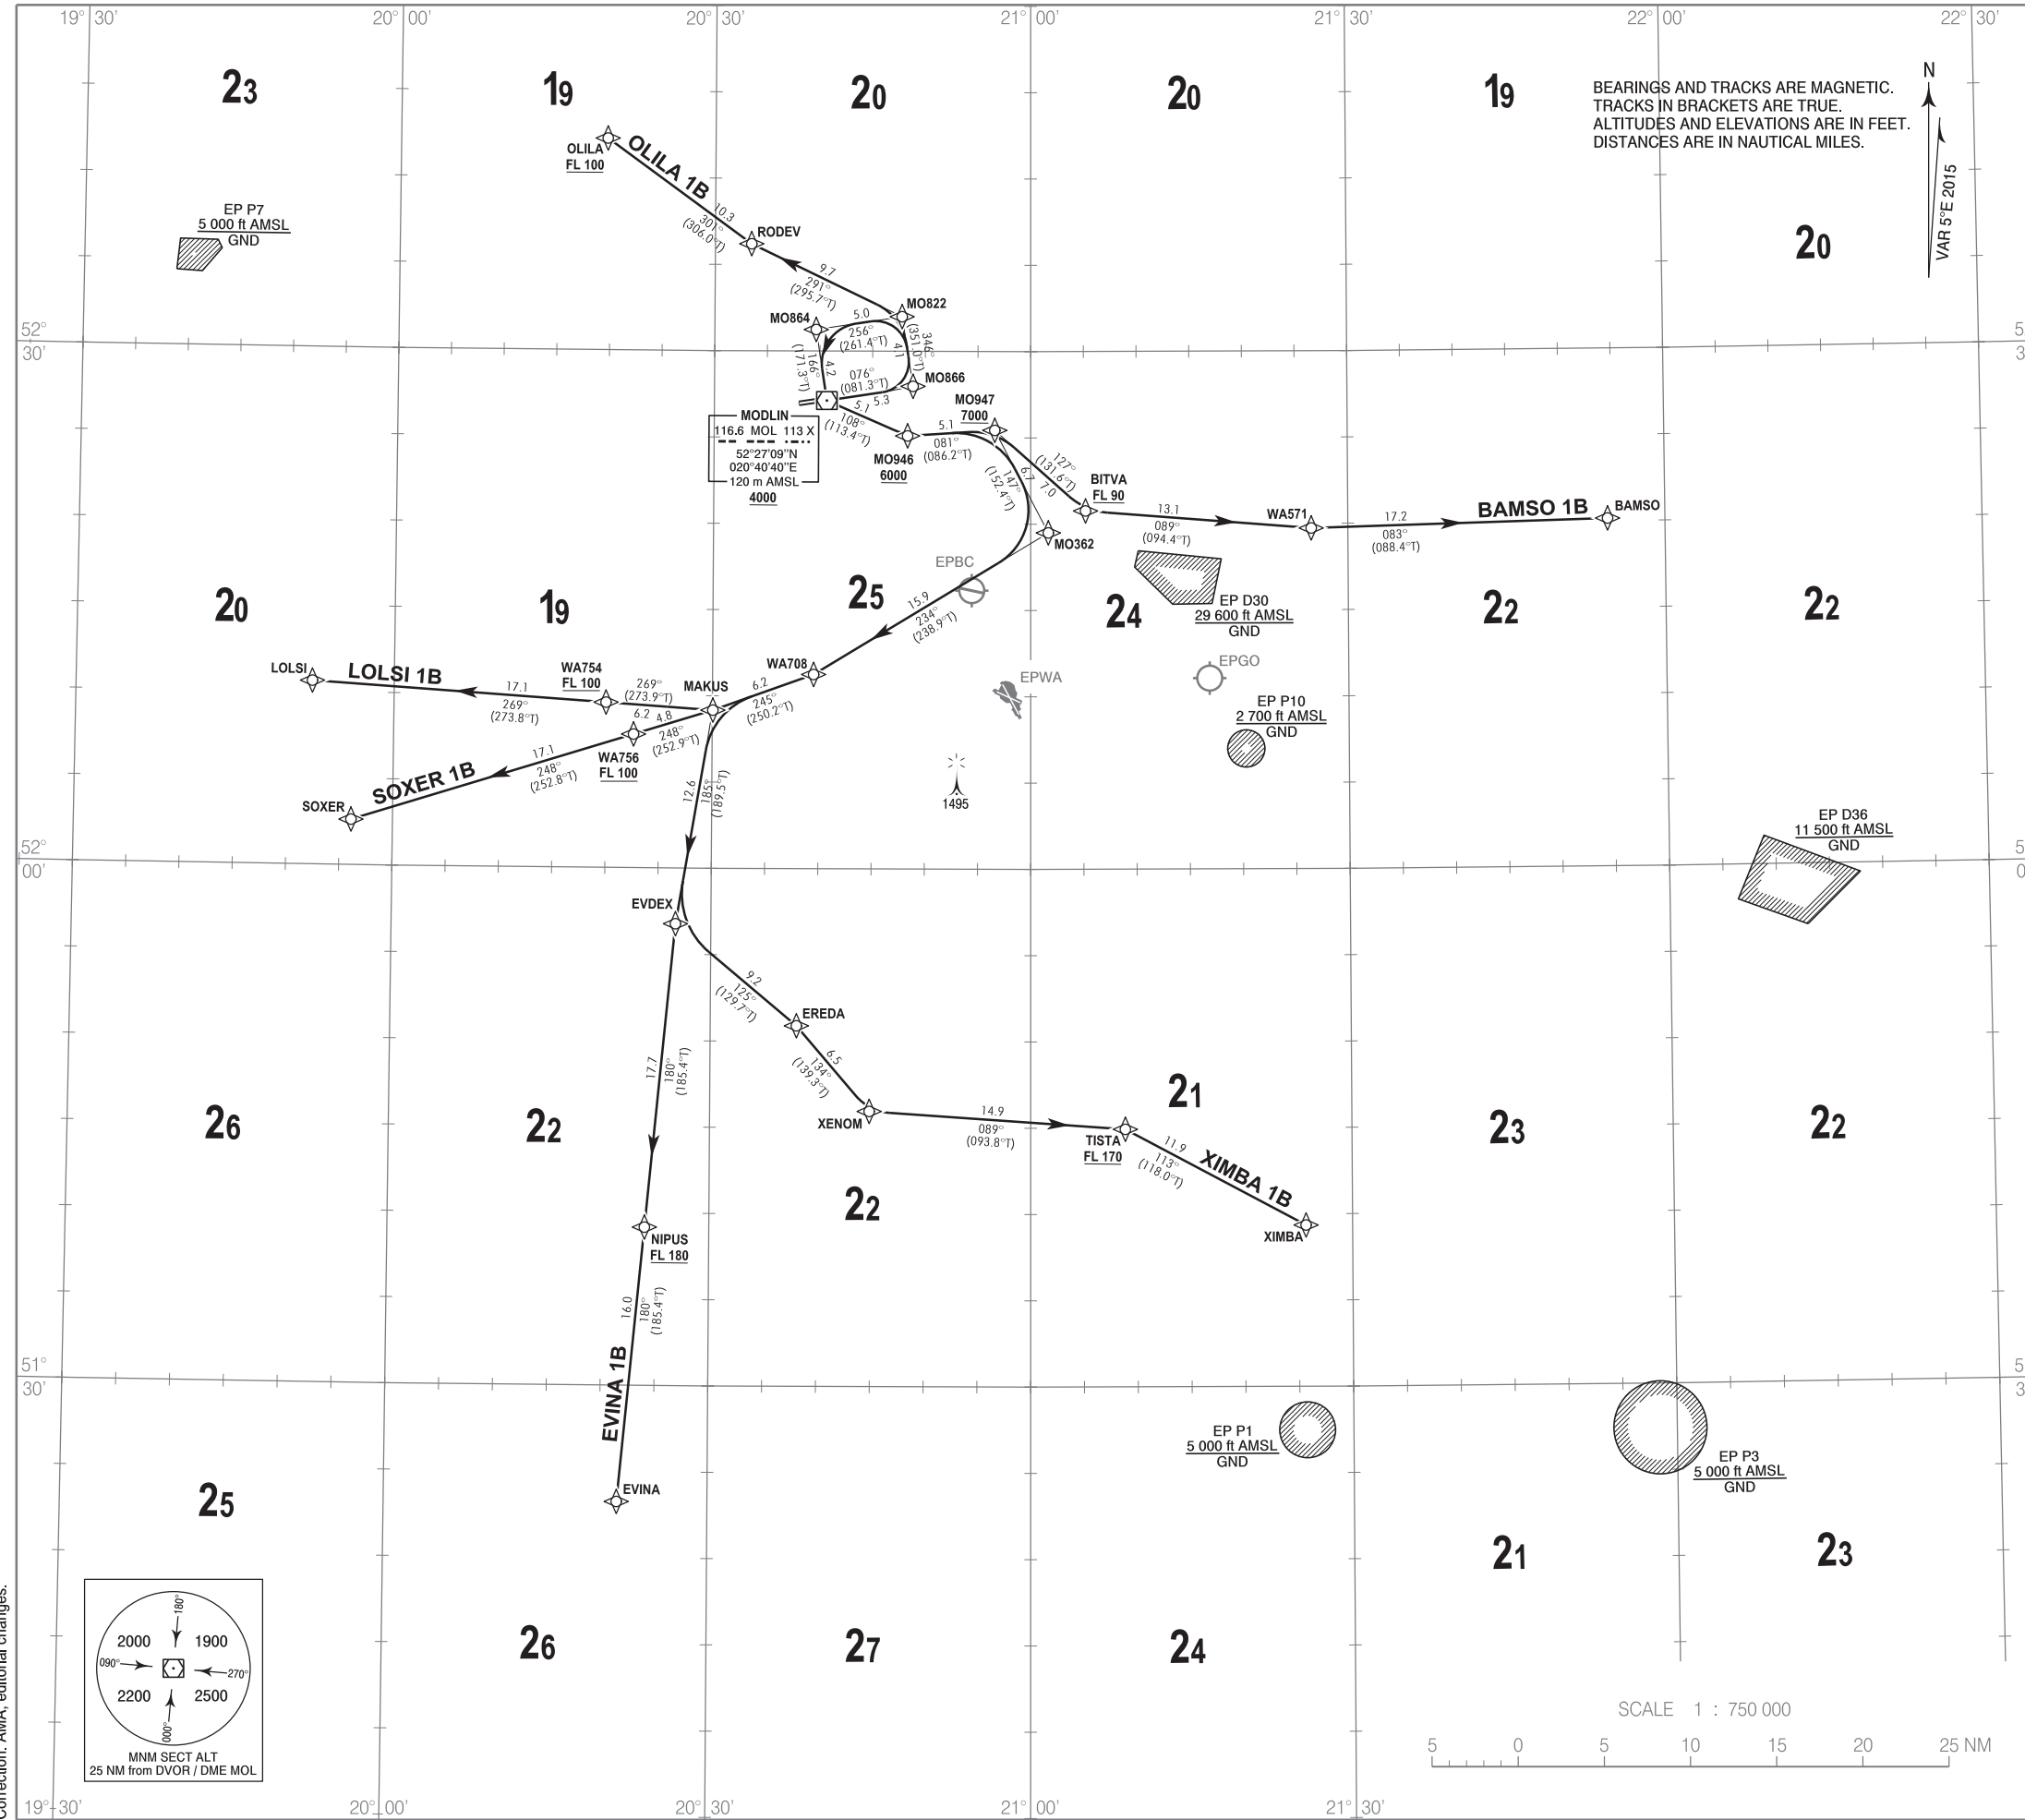

BEARINGS AND TRACKS ARE MAGNETIC.  
TRACKS IN BRACKETS ARE TRUE.  
ALTITUDES AND ELEVATIONS ARE IN FEET.  
DISTANCES ARE IN NAUTICAL MILES.

- RNAV 1 (P-RNAV) approval required to conduct these procedures without additional restrictions. However it is possible to utilize P-RNAV trajectories by RNAV 5 only approved aircraft. The following restriction apply: A/c equipped with RNAV 5 systems without navigation database, and requiring manual data input are exempted from the utilization of RNAV 1 (P-RNAV) procedures.
- All aircraft which can not follow and utilize RNAV 1 (P-RNAV) procedures shall advise ATC before start up. Radar vectoring will be provided, usually along published procedures.
- Expect direct routing/shortcuts by ATC whenever possible (especially during off-peak hours).
- MAX IAS during initial turn as indicated in route description.
- Initial SID climb: climb and maintain 4000 unless otherwise cleared by ATC.
- Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

**RADIO COMMUNICATION FAILURE PROCEDURE**

SET TRANSPONDER TO 7600

- Continue on assigned and acknowledged SID. After 3 minutes from setting 7600 climb to FPL flight level.
- If being vectored, continue on assigned heading for 3 minutes from setting 7600 then proceed direct to last SID WP climbing to FPL flight level.

Correction: AMA, editorial changes.

