


**STANDARD DEPARTURE CHART
INSTRUMENT
(SID) - ICAO**

AERODROME ELEV 693 ft

Rzeszów DELIVERY 121.800
Rzeszów TOWER 126.800

**Rzeszów - Jasionka
RWY 27**

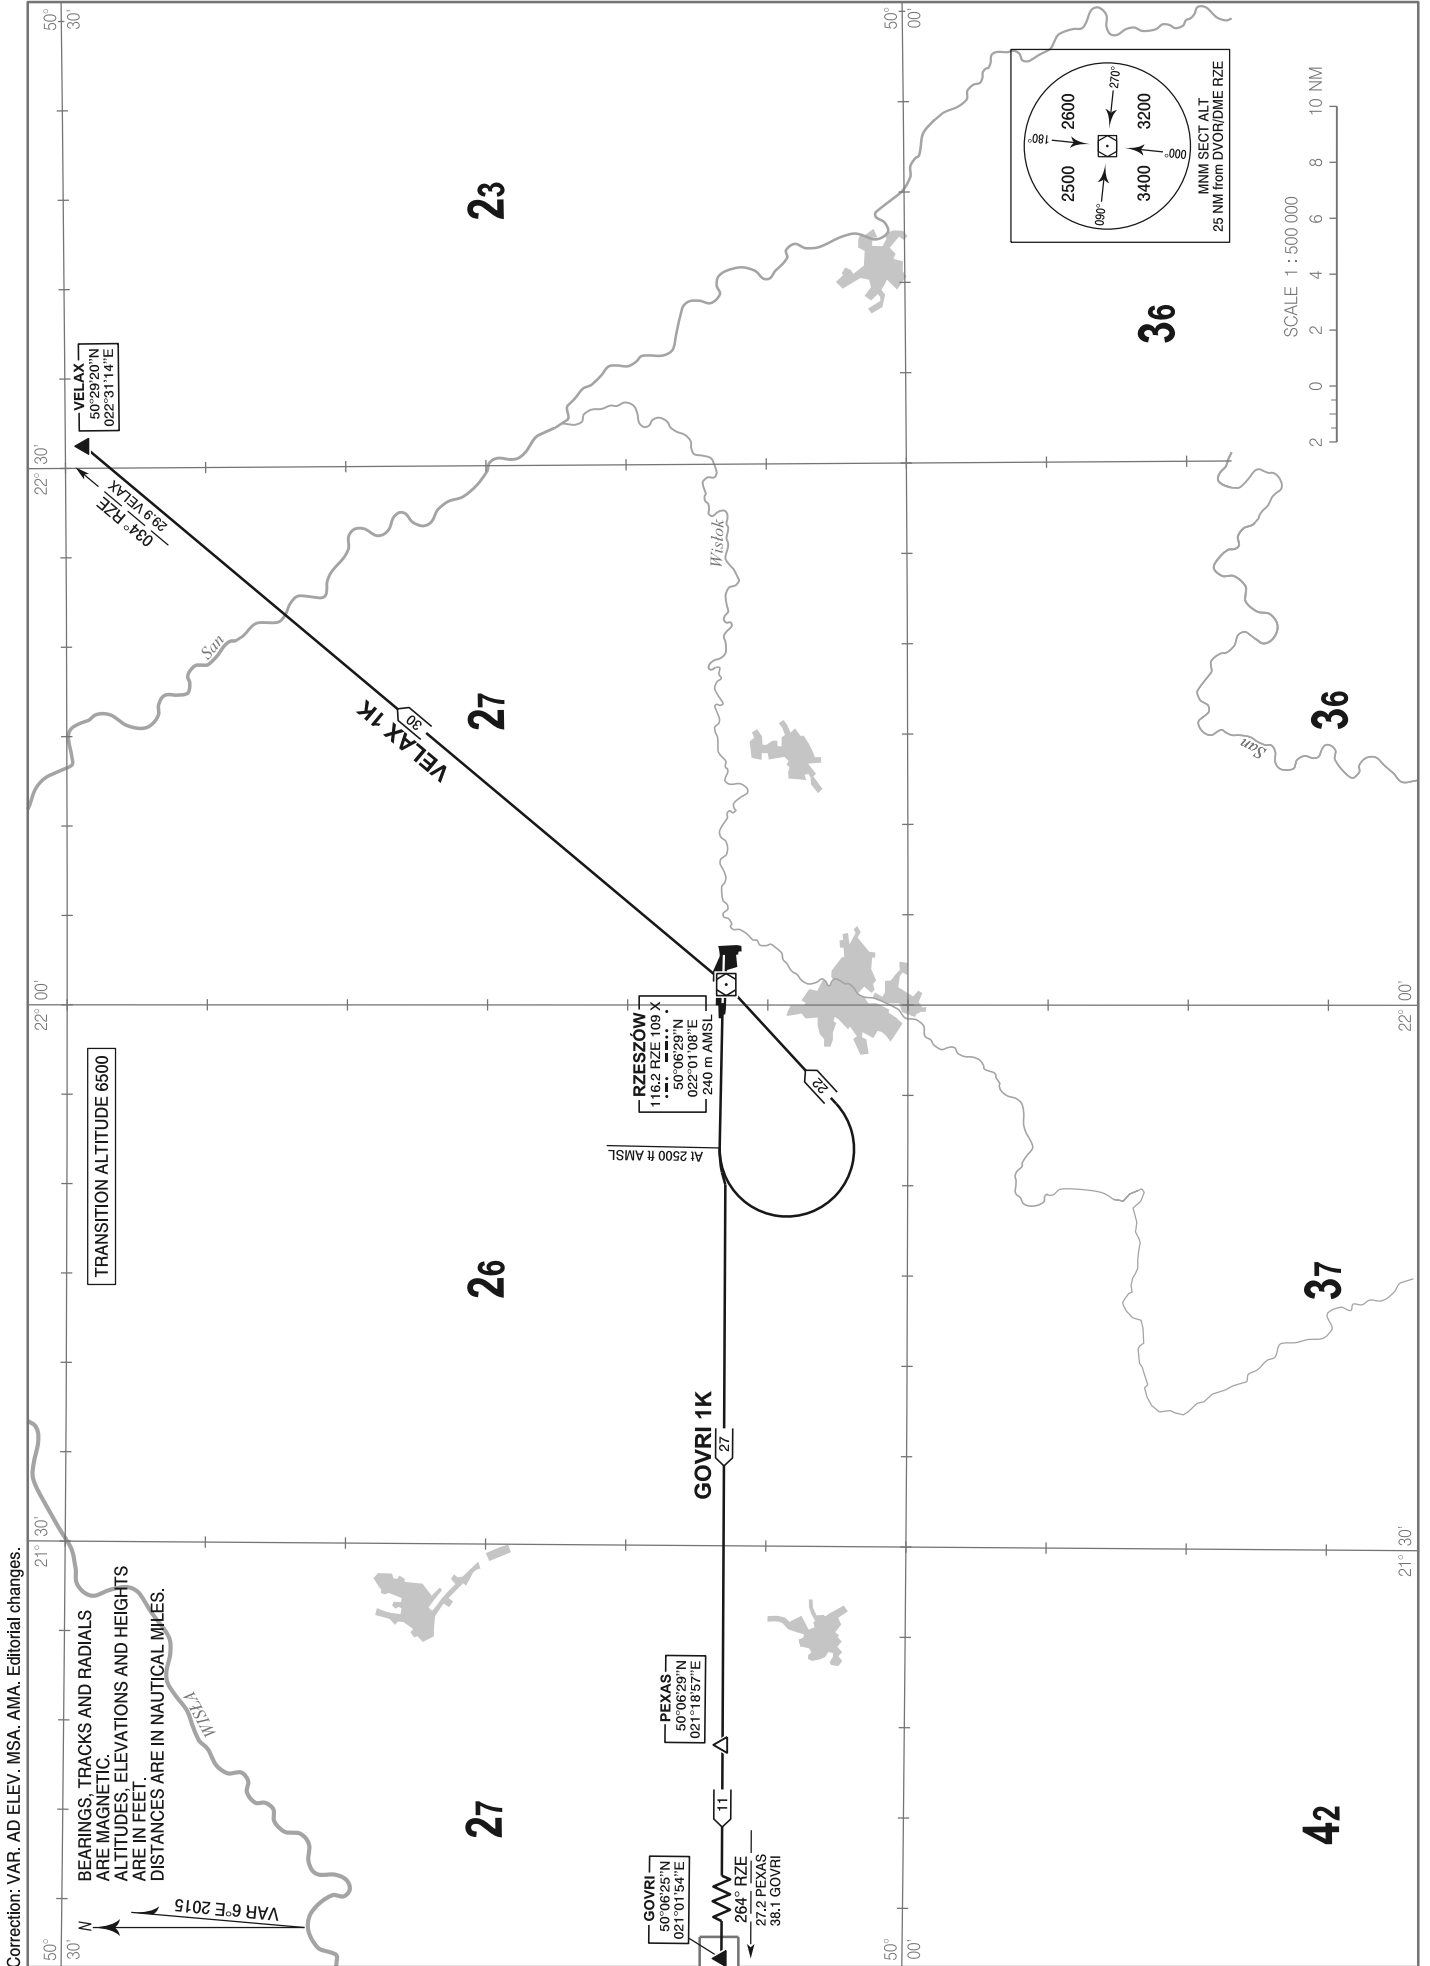

Correction: VAR. AD ELEV. MSA. AMA. Editorial changes.

BEARINGS, TRACKS AND RADIALS
ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND HEIGHTS
ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**
**Rzeszów - Jasionka
RWY 27**

DESIGNATOR	ROUTE DESCRIPTION SID 27	REMARKS
VELAX 1K	Climb gradient of 5.7% required to 2500 ft, thereafter required climb gradient of 4.2% to RZE at or above 6300 ft. On RWY track to 2500 ft. Turn left direct RZE. From RZE follow RDL 034 RZE to VELAX. Further instructions from ATC.	SID routes requirements: - IAS max 250 kt below FL100 unless otherwise cleared by ATC, - bank angle of 15°, - standard PDG=3.3% (except when otherwise mentioned in SID route description),
GOVRI 1K	Climb gradient of 5.7% required to 2500 ft, thereafter required climb gradient of 5.9% to PEXAS. On RWY track to 2500 ft. Turn left to intercept RDL 264 RZE to GOVRI. Further instructions from ATC.	- non-standard climb gradient required due airspace restriction only. For turns to RZE and ARSOG required bank angle is 20°. ACFT unable to achieve SID profile restrictions must request non-standard departure from ATC services before start-up.